




Ready-to-use product

Roof paint

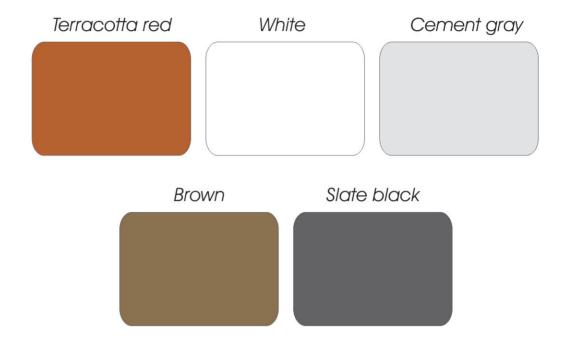

DESTINATION

ABBAcoat is designed to coat roof surfaces such as slates or fibre cement tiles, concrete or terracotta tiles.

ABBAcoat is particularly adapted to block out asbestos fibres onto fibre-cement based materials.

ABBAcoat can be applied on a basis of 200 to 500 g/m² depending on the porosity and roughness of the surfaces.



www.abba-products.com

PRESENTATION

ABBAcoat is an aqueous paint which has been specially designed to be applied onto roofs, on a base of acrylic-vinyl basis.

ABBAcout is available in the following colours: slate black, terracotta red, cement grey, brown and white. (colours can be adapted by adding universal colourings for aqueous paint)

ABBAcout gives surfaces a long lasting protection thanks to its resistance to bad weather in urban, rural or industrial surroundings.

ABBAcoat offers a very good adherence and has a very fast drying time.

HOW TO APPLY

ABBAcoat can be applied onto clean, dry and stable surfaces in two coats (with a brush, roll or gun)

ABBAcout can be diluted with water in variable proportions depending on the way it is applied and according to the porosity of the surface as per the following indicative methods:

- first coat: add 10 to 20% water for gun application, or 5 to 10% water for brush or roll application.
- second coat: add 5 to 10% water for gun application, no need to add any water for brush or roll application.
- third coat, if necessary: as per second coat.

PACKAGING

- -6-Kgjar
- 30-Kg bucket

This document presents the main information regarding this product.

The detailed information sheet is available upon request.

Our technical service is at your disposal to advise you on this product